

471-24V

Proyector led 24V

Floodlight led 24V

Aplicación:

- *Fijado a pared*
- *Fijado a columna.*

Application:


- *Fixed to the Wall*
- *Fixed to column*



Eficiencia y durabilidad son las características de este proyector, ideal para la sustitución de los antiguos equipos magnéticos o electrónicos, consiguiendo un gran ahorro energético, manteniendo los flujos lumínicos. Montados con chips SMD de alta eficiencia y durabilidad, disponible en 24V (DC o AC), ideal para su instalación en barcos o zonas con generadores....

Efficiency and durability are the characteristics of this projector, ideal for replacing old magnetic or electronic equipment, achieving great energy savings, maintaining light flows. Mounted with SMD chips of high efficiency and durability, available in 24V (DC or AC), ideal for installation in ships or areas with generators...

Referencia <i>Reference</i>	Potencia <i>Power</i>	Voltaje <i>Voltage</i>	Frecuencia <i>Frequency</i>	Ra <i>Ra</i>	Estanqueidad <i>Protection</i>
471.030AC	30W	24V	50 / 60 Hz	>80	IP 65
471.030DC	30W	24V	50 / 60 Hz	>80	IP65
471.050AC	50W	24V	50 / 60 Hz	>80	IP 65
471.050DC	50W	24V	50 / 60 HZ	>80	IP 65

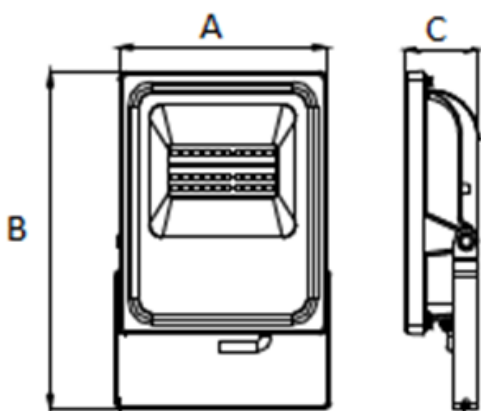

Referencia <i>Reference</i>	A	B	C
471.030	195,00 mm	278,00 mm	62,30 mm
471.050	235,50 mm	361,50 mm	69,50 mm

Características:

- Cuerpo realizado en aluminio fundido a presión
- Disipador en aluminio fundido
- Foco en aluminio purísimo
- Pantalla de protección frontal de vidrio templado de 4 mm. de espesor
- Lira en acero para su instalación y ángulo de elevación ajustable
- Equipo lumínico y driver incluido.
- Temperatura de trabajo -20° +50°C
- Vida útil media: L70B50 30.000 horas
- LED SMD
- 24V (DC o AC)

Features:

- Body made of die-cast aluminum
- Cast aluminum heatsink
- Pure aluminum focus
- 4 mm thick tempered glass front protection screen
- Steel support for installation and adjustable lifting angle
- Lighting equipment and driver included
- Working temperature -20° - +50°
- Average lifespan: L70B50 30.000 hours
- SMD LED
- 24V (DC or AC)

Datos lumínicos:

Light data:

	471.030		471.050	
	LED	Lum.	LED	Lum.
3000 K	3.600 lm	3.030 lm	6.000 lm	5.050 lm
4000 K	3.900 lm	3.300 lm	6.500 lm	5.500 lm
6000 K	4.200 lm	3.540 lm	7.000 lm	5.840 lm

471.050

