

PAOCLED

Luminaria empotrar
Recessed luminaire

Instalación:


- *Empotrada*

Installation:

- *Recessed*



Referencia	Potencia	Voltaje	Frecuencia	FP	Ra	THD	UGR	Estanqueidad
PAOCLED30	26W	AC 220-240V	50 / 60 Hz	> 0,90	>80	< 20	< 19	IP 40
PAOCLED50	35W	AC 220-240V	50 / 60 Hz	> 0,90	>80	< 20	< 19	IP 40
PAOCLED60	60W	AC 220-240V	50 / 60 Hz	> 0,90	>80	< 20	< 19	IP 40

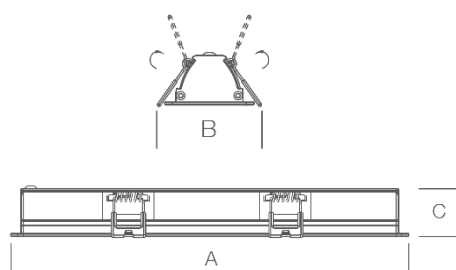

Referencia	A	B	C
PAOCLED30	1200 mm	70 mm	35 mm
PAOCLED50	1800 mm	70 mm	35 mm
PAOCLED60	2400 mm	70 mm	35 mm

Características:

- Luminaria empotrable led.
- Cuerpo realizado en aluminio.
- Difusor en metacrilato.
- Equipo lumínico y driver incluido.
- Posibilidad de hacer líneas continuas.
- Vida útil media: L70B50 30.000 horas
- UGR < 19
- Ra >80
- Temperatura de trabajo: -10° C- +40°C

Features:

- LED recessed luminaire.
- Body made of aluminum.
- Diffuser in methacrylate.
- Lighting equipment and driver included.
- Possibility of making continuous lines.
- Average lifespan: L70B50 30,000 hours
- UGR <19
- Ra > 80
- Working temperature: -10° C- + 40°C

Accesorios opcionales:

- Balasto electrónico regulable

Optional accessories:

- Dimmable electronic ballast

Datos lumínicos:

Light data

	LED	Luminaria
PAOCLED30	3.250 lm	2.700 lm
PAOCLED50	4.860 lm	4.500 lm
PAOCLED60	6.720 lm	5.400 lm

