

GERIATRICO

Cabecero de cama hospitalario
Hospital bed head

Instalación:

- *Superficie*

Installation:



- *Surface*



Referencia <i>Reference</i>	Potencia <i>Power</i>	Voltaje <i>Voltage</i>	Frecuencia <i>Frequency</i>	Lúmenes <i>Lumen</i>	Estanqueidad <i>Protection</i>
GERI18D118IT	18W dir 18W ind	AC 220-240V	50 / 60 Hz	1350+1350 lm	IP 30
GERI18D136IT	18W dir 36W ind	AC 220-240V	50 / 60 Hz	1350+3350 lm	IP 30
GERI18D118I	18W dir 18W ind	AC 220-240V	50 / 60 Hz	1350+1350 lm	IP 30
GERI136D136I	36W dir 36W ind	AC 220-240V	50 / 60 Hz	3350+3350 lm	IP 30
GERI18D136I	18W dir 36W ind	AC 220-240V	50 / 60 Hz	1350+3350 lm	IP 30

*Datos luminicos con tubo fluorescente OSRAM, pueden variar con otras marcas

*Luminous data with OSRAM fluorescent tube, may vary with other brands

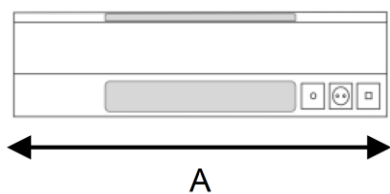

Referencia <i>Reference</i>	A	B	C
GERI18D118IT	1262 mm	140 mm	212 mm
GERI18D136IT	1262 mm	140 mm	212 mm
GERI18D118I	651 mm	140 mm	212 mm
GERI136D136I	1262 mm	140 mm	212 mm
GERI18D136I	1262 mm	140 mm	212 mm

Características:

- Luminaria para instalar sobre los cabeceros de cama, que combina la iluminación ambiente con la luz de lectura.
- Cuerpo realizado en chapa de acero fosfatado y pintado con resina epoxi poliéster termo-endurecida de color blanco.
- Difusor de policarbonato prismático.
- Para tubo lineal T-8.
- Indicada para centros de saludo y centros de día.
- Disponible con cuatro combinaciones distintas de iluminación ambiente (indirecta), luz de lectura (directa) y tomas.

Features:

- Luminaire to be installed over the headboards, which combines ambient lighting with reading light
- Body made of phosphatized steel sheet and painted with thermos-hardened white epoxy polyester resin
- Prismatic polycarbonate diffuser
- For T-8 linear tube
- Indicated for greeting centers and day centers
- Available with four different combinations of ambient lighting (indirect), reading light (direct) and sockets

Accesorios opcionales:

- Equipo electrónico regulable
- Posibilidad de Kit de emergencia
- Opción de cableado tubo de LED T-8
- Opción de instalación en led
- Tomas opcionales:
 - RJ45
 - Tirador llamada a enfermera
 - Schucko
 - Interruptor, conmutador o cruzamiento, individual o doble
 - Tirador de encendido

Optional accessories:

- Dimmable electronic ballast
- Possibility of emergency kit
- Option of wiring LED T-8 tube
- Option of installation on led
- Optional sockets:
 - RJ45
 - Handle for call nurse
 - Schucko
 - Switch, commutator, crossover, single or double
 - Power switch

Curva fotométrica:

Photometric curve:

